

VDP-DH-HAC9210

2MP IP Villa Outdoor Station



Features

- 2MP HD CMOS camera
- Zinc alloy panel, IP65, IK10
- 5m ICR Night vision & Voice indication
- Video & Audio messaging
- TCP/IP, SIP
- Surface mounted



Technical Specification

Model	VDP-DH-HAC9210
-------	----------------

System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

Camera

Image Sensor	1/2.7" 2MP CMOS
Focal Length	2.8mm
Angle of View	H:100°
Angle of View adjustment	Horizontal: -45° ~ +45°

Video

Video Compression	H.264
Video Streaming	Dual Stream
Day/Night	Auto(ICR), 5m
BLC Mode	WDR
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Gain Control	Auto/Manual
OSD	Support

Audio

Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Audio processing	Noise suppression, Echo cancellation

Operation Mode

Keypad	1 Mechanical Button
--------	---------------------

Interface

Door Control	1
Alarm In	1
RS485	1


Network

Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP, SIP


General

Ingress Protection	IP65, IK10
Tamper Switch	1
Tamper Screw	Support
Installation	Surface
Material	Front Panel: Zinc alloy Rear Panel: Aluminum alloy Holder: Aluminum alloy
Power	DC 12V, PoE(802.3af)
Power Consumption	Standby ≤2.5W, Work ≤7W
Working Temperature	-40°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	163.0mm×73.0mm×54.5.0mm
Weight	0.8Kg

Dimensions

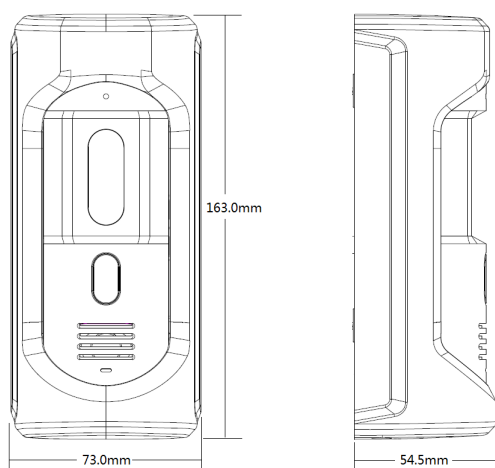

View Area

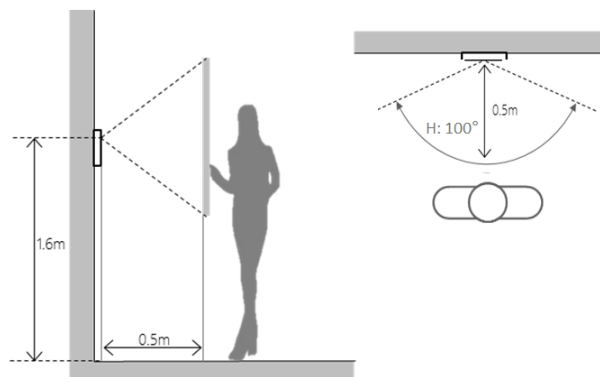

Application

